

1550nm/1310nm/1064nm PM Fiber Mirror

Features

- Low Insertion Loss
- High Return Loss
- High Reliability
- High Stability


Applications

- Fiber Optic Instruments
- Fiber Sensors
- Fiber Lasers
- Coherent Detecting
- Research

Specifications

Parameters	Unit	Value	
Center Wavelength	nm	1310 or 1550	1064
Operating Wavelength Width	nm	±15	±5
Max. Insertion Loss	dB	0.6	0.8
Min. Extinction Ratio at 23 °C, only for PI	dB	20	
Max. Polarization Mode Dispersion	ps	0.05	
Max. Power Handling	mW	500	
Max. Tensile Load	N	5	
Operating Temperature	°C	-5~+70	
Storage Temperature	°C	-40~+85	

Package Dimensions

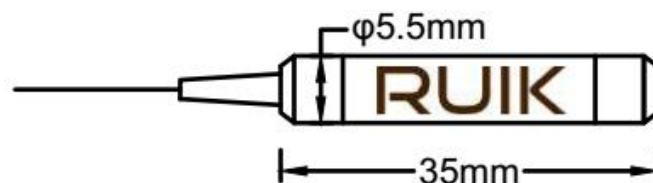

Ordering Information

PMFM-1111-222-345-6

1111	-Center Wavelength:	1550=1550nm, 1310=1310nm,.....,0850=850nm
2	-Fiber Type:	001=PM1550, 002=PM1310, 003=PM980, 004=Hi1060, 008=SMF-28E
3	-Package Dimension:	0=φ5.5x35mm, S=Specified
4	-Pigtail Type:	0=250μm bare fiber, 1=900μm loose tube
5	-Fiber Length:	0=0.8m, 1=1m
6	-Connector Type:	0=FC/UPC, 1=FC/APC, 2=SC/UPC, 3=SC/APC, 4=LC/UPC, 5=LC/APC, N=None