

980nm High Power Circulator (TGG Based)

Features

Low Insertion Loss
High Return Loss
High Isolation
High Stability & Reliability


Applications

Fiber Amplifier
Testing Instrument
Fiber Sensor
Medical Equipment

Specifications

Parameters	Unit	Value
Center Wavelength	nm	980
Operating Wavelength Range	nm	±5
Typ. Peak Isolation	dB	25
Max. Isolation at 23℃	dB	22
Typ. Insertion Loss at 23℃	dB	1.3
Max. Insertion Loss at 23℃	dB	1.5
Max. Polarization Dependent Loss at 23℃, only for PI	dB	0.15
Min. Return Loss(Input/ Output)	dB	45
Min. Cross Talk	dB	45
Max. Average Optical Power	W	20
Max. Peak Power for ns Pulse	kW	10
Max. Tensile Load	N	5
Package Dimension	mm	64x28x26
Operating Temperature	℃	+10~+50
Storage Temperature	℃	0~+60

Package Dimensions

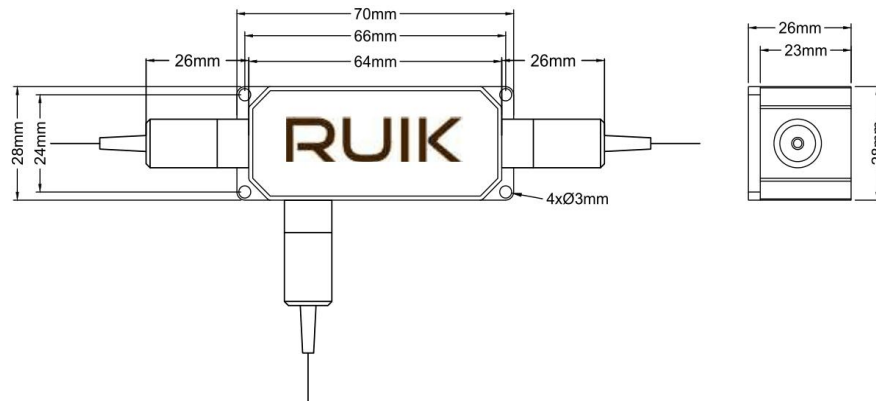

Ordering Information

PICIR-1111-2-333-456-777-8899

1064	-Center Wavelength:	1064=1064nm, 1030=1030nm, 980=980nm
2	-Port Type:	3=3-Port
333	-Fiber Type:	001=PM1550, 002=PM1310, 003=PM980, 004=Hi1060, 008=SMF-28E
4	-Package Dimension:	0=64x28x26mm, S=Specified
5	-Pigtail Type:	0=250µm bare fiber, 1=900µm loose tube
6	-Fiber Length:	0=0.8m, 1=1m
777	-Connector Type:	0=FC/UPC, 1=FC/APC, 2=SC/UPC, 3=SC/APC, 4=LC/UPC, 5=LC/APC, N=None
88	-Average Power:	00=500mW, 01=1W, 02=2W,, 05=5W, 10=10W
99	-Peak Power:	10=10kW, 20=20kW